



AIR-CONTROLLED AIRLESS PAINT SPRAY EQUIPMENT



HIGH QUALITY FINISHING


AIR-CONTROLLED AIRLESS SPRAYER

High performance in liquid spray applications to maximize the transfer efficiency.

GHIBLI 30:1 Carbon steel version. Mobile, compact, powerful spray package with high durability, available in different configurations.

L400 AIR-CONTROLLED AIRLESS GUN

- Max. pressure 180 bar
- Max. air pressure 7 bar
- All parts in contact with product are made in stainless steel

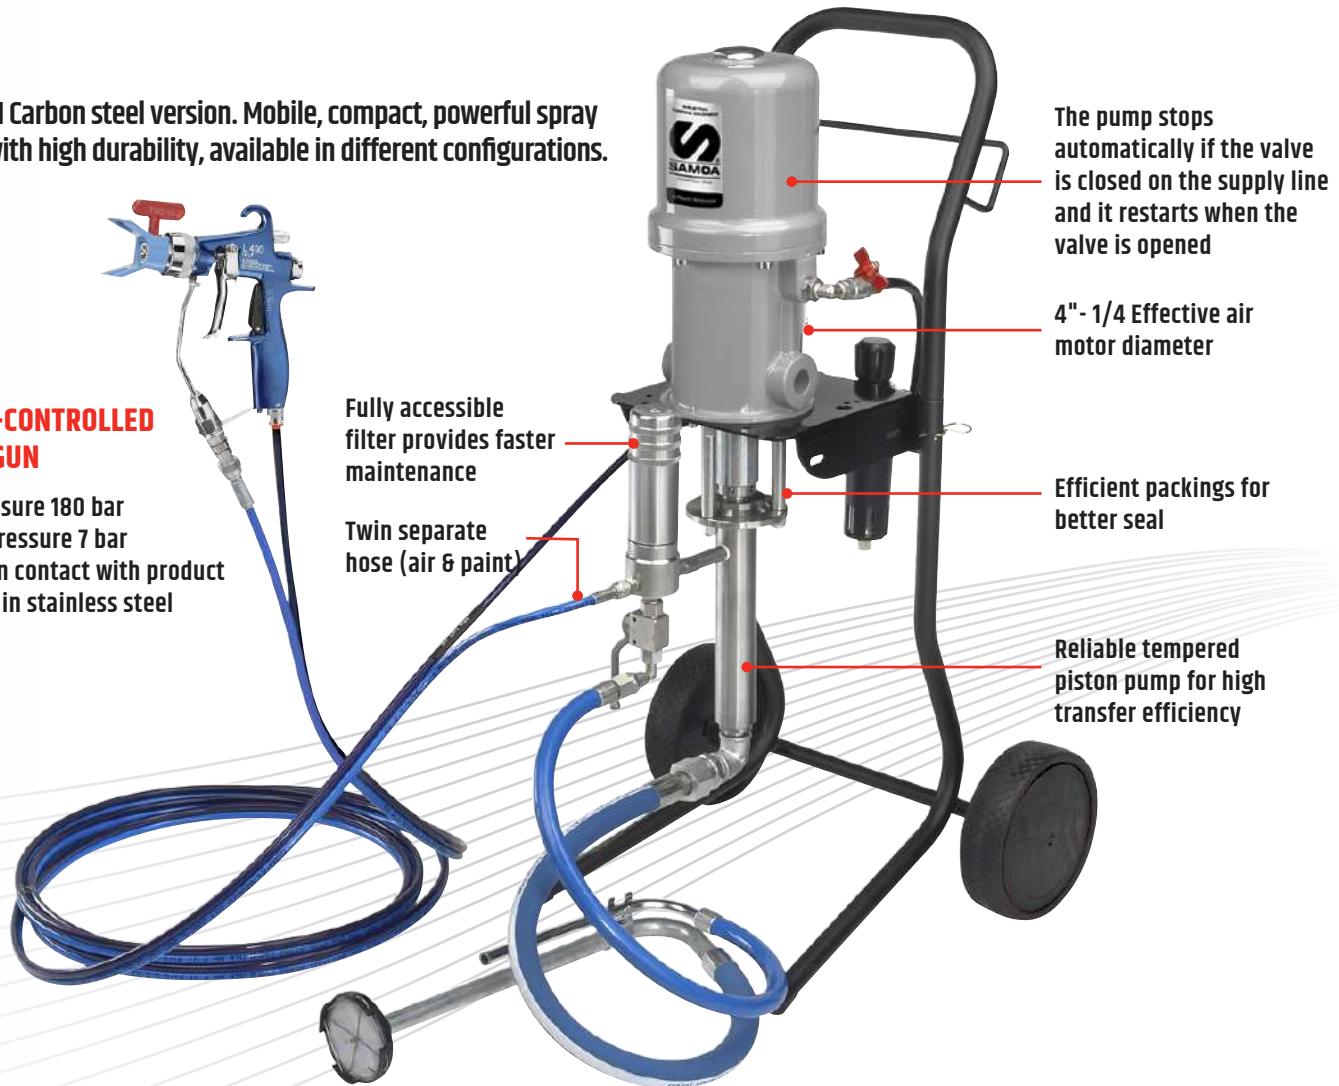

CHOOSE THE BEST CONFIGURATION FOR YOUR SPRAY APPLICATION

MODEL	MATERIAL	PART NO.	TROLLEY	SUCTION SYSTEM	FILTER	HOSE	GUN	SPRAY NOZZLES INCLUDED
VEGA 34:1	Stainless Steel	LA98135	•	•	•	-	-	-
		LAK98135	•	•	•	LA14061	LA21800S	LAACA11-40 / LAACA13-40
GHIBLI 30:1	Carbon Steel	LA96105	•	•	•	-	-	-
		LAK96135	•	•	•	LA14061	LA21800S	LAACA11-40 / LAACA13-40
		LAK91480	•	•	•	LA14061	LA21801	LATSC13-40
	Stainless Steel	LA96107	•	•	•	-	-	-
		LAK96137	•	•	•	LA14061	LA21800S	LAACA11-40 / LAACA13-40
		LAK91485	•	•	•	LA14061	LA21801	LATSC13-40
GHIBLI 40:1	Carbon Steel	LA96041	•	•	•	-	-	-
		LAK96041	•	•	•	LA14061	LA21800S	LAACA11-40 / LAACA13-40
		LAK91041	•	•	•	LA14061	LA21801	LATSC13-40
	Stainless Steel	LA96108	•	•	•	-	-	-
		LAK96108	•	•	•	LA14061	LA21800S	LAACA11-40 / LAACA13-40
		LAK91108	•	•	•	LA14061	LA21801	LATSC13-40

ACA: Air-controlled airless nozzle.
TSC: Top spraying clean airless nozzle

TWO TECHNOLOGIES COMBINED FOR BETTER RESULT

Air-Controlled Airless combines the advantages of conventional and airless spraying. The high delivery, high productivity of airless is combined with the high quality finishing of low pressure air spray obtaining the perfect combination of high delivery, spray fan control and finishing.

With 2 air motors, 2 pressure ratios and over 7 configurations, our air-controlled airless sprayers are designed to provide the right flow rates at right pressures to fit all your spraying needs.

VEGA 34:1

- Air-controlled airless
- 3" Effective air motor diameter
- Stainless steel configuration.



GHIBLI 30:1 - 40:1

- Air-controlled airless
- 4"-1/4 Effective air motor diameter
- Carbon steel or stainless steel construction.




Atex Certified
Ex II 2 G c IIB T6

TECHNICAL DATA

MODEL	VEGA 34:1	GHIBLI 30:1	GHIBLI 40:1
Max. Air Pressure	7 bar	7 bar	6,5 bar
Max. Fluid outlet Pressure	240 bar	210 bar	260 bar
Air inlet	3/8" BSPP (F)	3/8" BSPP (F)	3/8" BSPP (F)
Material outlet	1/4" BSPP (M)	1/4" BSPP (M)	1/4" BSPP (M)
Air consumption	180 l/min (3 bar)	400 l/min (3 bar)	400 l/min (3 bar)
	380 l/min (5 bar)	800 l/min (5 bar)	800 l/min (5 bar)
	550 l/min (7 bar)	850 l/min (7 bar)	830 l/m (6,5 bar)
Sound pressure level	< 80 dB	< 80 dB	< 80 dB
Motor effective diameter	76 mm (3")	108 mm (4"-1/4)	108 mm (4"-1/4)
Pump stroke	76 mm (3")	102 mm (4")	102 mm (4")
Delivery for cycle	21 cc	63 cc	50 cc
Max. Delivery at 60 cycles/min	1,3 l/min	3,8 l/min	3 l/m
Seals materials	PTFE + Polyethylene	PTFE + Polyethylene	PTFE + Polyethylene
Weight	24 kg	30 kg	30 kg

MATERIALS

- Water and solvent based products
- Lacquers
- Enamels
- Fixatives
- Primers & Undercoats
- Top coats & finishing coats
- ETC...

APPLICATIONS

- Woodwork and furniture
- Metal products and machinery
- General industrial finishing

HIGH PERFORMANCE ACCESSORIES TO COAT ANY SURFACES

Let's go to spray immediately!

Air-Controlled Airless pumps features: double air adjustment (pump inlet - gun inlet), line filter, discharge valve, suction system.
In the stainless steel versions filters and suction system parts in contact with fluid are in stainless steel.








L400 AIR-CONTROLLED AIRLESS MANUAL SPRAY GUN

Max. operating pressure 110 bar / 180 bar with reinforced spring.
STAINLESS STEEL - HARD METAL - PTFE FLUID PASSAGE.



Available in two versions, with fix or reversible nozzle.

The Part No. LA21808 kit allows you to switch from a fixed nozzle to a self-cleaning nozzle.

AIR-CONTROLLED AIRLESS GUNS		AIR-CONTROLLED AIRLESS NOZZLES	TOP SPRAYING CLEAN AIRLESS NOZZLE	AIR-CONTROLLED AIRLESS TWIN HOSES	ACCESSORY
Guns for air-controlled airless nozzles	Guns for top spraying clean nozzles	ACA Series Sizes from 7 - 20 to 31 - 65	TSC Series Sizes from 7 - 10 to 31 - 60	Max. pressure paint: 200 bar Maximum pressure Air: 15 bar - Ø 3/16" - 1/4"	Part No. LA94081 Gravity tank 6 l with recirculation
Part No. LA21800S Short filter version	Part No. LA21801 Short filter version			Part No. LA14061 , 7,5 m Part No. LA14062 , 10 m Part No. LA14063 , 15 m	
Part No. LA21802S Long filter version	Part No. LA21803 Long filter version		Mist clean base 2 Part No. LA21900 		
			AIRLESS NOZZLES • Easy cleaning: turn the nozzle and rinse. • Manufactured in tungsten carbide • Stainless steel gasket		



SAMOA INDUSTRIAL, S.A. - HEADQUARTERS

SPAIN AND EXPORT MARKETS
POL. IND. PORCEYO, I-14 - CAMINO DEL FONTÁN, 831
E-33392 GIJÓN (ASTURIAS), SPAIN
TEL: +34 985 381 488 - FAX: + 34 985 147 213

SAMOA ITALY - LARIUS

ITALY
VIA ANTONIO STOPPANI, 21
23801 CALOLZIOCORTE (LC) ITALY
Tel.: +39 0341 621152 - Fax: + 39 0341 621242
www.larius.com

SAMOA LTD.

UNITED KINGDOM AND REP. OF IRELAND
ASTURIAS HOUSE - BARRS FOLD ROAD
WINGATES INDUSTRIAL PARK
WESTHOUGHTON, BL5 3XP, UK
TEL: +44 1942 850600 - FAX: +44 1942 812160

SAMOA S.A.R.L.

FRANCE
P.A.E.I. DU GIESSEN
3, RUE DE BRISCHBACH
67750 SCHERWILLER, FRANCE
TEL: +33 3 88 82 79 62 - FAX: +33 3 88 82 77 88

SAMOA FLOWTECH GMBH

GERMANY, AUSTRIA, SWITZERLAND, THE NETHERLANDS AND GREECE
AM OBEREICHHOLZ 4
D - 97828 MARKTHEIDENFELD, GERMANY
TEL: +49 9391 9826 0 - FAX: +49 9391 98 26 50

SAMOA CORPORATION

USA, CANADA AND MEXICO
90 MONTICELLO ROAD
WEAVERVILLE, NC 28787, USA
TEL. +1 (828) 645-2290 - FAX: +1 (828) 658 0840



©Copyright, SAMOA INDUSTRIAL, S.A.

SAMOA Industrial, S.A. is an ISO 9001, ISO 14001 and ISO 45001 certified company.