



USER-FRIENDLY, RELIABLE, HIGH EFFICIENCY

PROFESSIONAL SPRAYING APPLICATIONS **FOR ALL COATING TYPES**

SAMOA manufactures efficient, ready-to-use electric diaphragm pumps that provide constant performance to meet all construction market requirements.

The right spray package can make a huge difference in its performance and durability. SAMOA offers a wide equipment range for painting large surfaces in a faster, efficient and smoother way.

- · Smooth spray finish from the first stroke.
- · Low and medium viscosity products. for construction and industry
- · Compact. lightweight and easy to transport.
- · Easy operation cleaning maintenance.

GIOTTO AIRLESS ELECTRIC DIAPHRAGM PACKAGE. DO YOU WANT TO ACHIEVE HIGHER PRODUCTIVITY? **USE TWO GUNS!**

Long life electric motor CC


The pressure gauge allows to check the operating pressure

> Pivot wheels and locking

110 VAC (60 Hz)

220 VAC (50 Hz)

380 VAC (50 Hz)

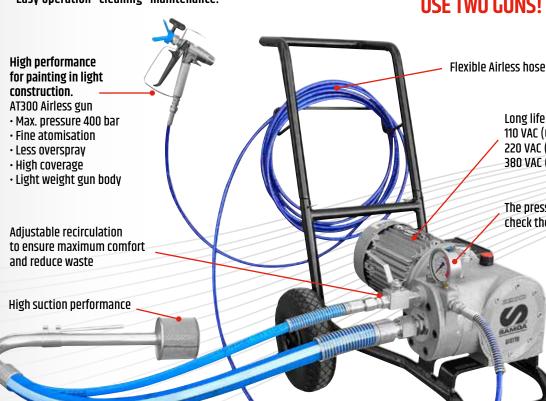

Water or solvent based products

· Varnishes, Wood impregnations

· Enamels, Primers, Gloss finishers

• Emulsions, Latex paints

- Facade paints, Plasters, Distempers
- · Flame retardants, damp proofing
- Fireproof, insulating coatings
- · Other...

• Indoors - Outdoors walls and facades

- Residential and industrial projects
- Property maintenance
- · Wood and metal working
- · Corrosion and structural protection
- Explosion protection
- · Covering / Removing amiantus
- Disinfection
- Roofs

SMALL SPRAY-PACK WITH THE BIGGER AIRLESS ADVANTAGES INSIDE

MIRÓ is the most compact sprayer in its class.

- Off-axis handle to allow the correct balance of the equipment.
- Frame designed to minimize the size and allow an easy transport.
- Space saving storage.
- · 6 I gravity tank to avoid product waste.



ELECTRIC AIRLESS DIAPHRAGM PUMPS







TECHNICAL DATA				
MODEL	MIRÒ	DALÌ	GIOTTO	
VERSION	Frame - Trolley	Trolley	Trolley	
MAX. DELIVERY	2,2 l/min	4 l/min	8 l/min	
MAX. WORKING PRESSURE	220 bar	220 bar	220 bar	
MOTOR POWER	0,75 Kw	1,1 Kw	2,2 Kw	
VOLTAGE	110 VAC (60 Hz) 220 VAC (50 Hz)	110 VAC (60 Hz) 220 VAC (50 Hz) 380 VAC (50 Hz)	110 VAC (60 Hz) 220 VAC (50 Hz) 380 VAC (50 Hz)	
UNIT WEIGHT	20 kg - frame / 23 kg - trolley	38 kg	66 kg	
MAX. NOZZLE SIZE	0,019"	0,027"	0,033"	
POWER GENERATION	3 Kw Single phase	3 Kw Single phase	5,5 Kw Single phase	
MATERIAL OUTLET	1/4" (M)	1/4" (M)	1/4" (M)	
SOUND PRESSURE LEVEL	≤ 65 dB (A)	≤ 65 dB (A)	≤ 75 dB (A)	

CHOOSE YOUR MIRÒ CONFIGURATION

Construction solutions for maximum reliability and quality.

	PART No.	SUCTION SYSTEM 6 LITRES TANK	MOTOR	FITTING	HOSE	GUN
TROLLEY	LAK21501/1	Suction system	220 V	1/4"	LA18017	LA11250
	LA21500/1	Suction system	220 V	1/4"	-	-
	LAK21503/1	Suction system	110 V	1/4"	LA18017	LA11250
	LA21502/1	Suction system	110 V	1/4"	-	-
	LAK21507/1	61	220 V	1/4"	LA18017	LA11250
	LA21506/1	61	220 V	1/4"	-	-
	LAK21509/1	61	110 V	1/4"	LA18017	LA11250
	LA21508/1	61	110 V	1/4"	-	-
STAND	LAK21561/1	Suction system	220 V	1/4"	LA18017	LA11250
	LA21560/1	Suction system	220 V	1/4"	-	-
	LAK21565/1	61	220 V	1/4"	LA18017	LA11250
	LA21564/1	61	220 V	1/4"	-	-

- · Pressure gauge include in all models
- Models with AT250 Airless spray gun include nozzle LASFC 15-40
 The K code pumps include the tool box Part No. LA17200

MIRÒ ACCESSORIES

- Part No. LA21590R Complete suction valve
- Part No. LA32150 Complete pressure regulation valve
- Part No. LA40131 Complete discharge valve
- Part No. LA53002R Complete diaphragm
- Part No. LA40130 Diaphragm kit





Part No. LA40130

CHOOSE YOUR GIOTTO CONFIGURATION

Construction solutions for maximum reliability and quality.

	PART NO.	MOTOR	FITTING	HOSE	GUN
SUCTION SYSTEM	LAK12480/1	220 V	1/4"	LA18023	LA11090
	LA12450/1	220 V	1/4"	-	-
	LAK12482/1	110 V	1/4"	LA18023	LA11090
	LA12452/1	110 V	1/4"	-	-
50 L TANK	LAK12458/1	220 V	1/4"	LA18023	LA11090
	LA12458/1	220 V	1/4"	-	-

- Pressure gauge include in all models
- Models with AT300 Airless spray gun include nozzle LASFC 21-40
- The K code pumps include the tool box Part No. LA17200

GIOTTO ACCESSORIES

- Part No. LA40365 Double outlet kit for two guns
- Part No. LA40175 Diaphragm kit
- Part No. LA33017R Complete suction valve
- Part No. LA83033 Complete discharge valve
- Part No. LA32150 Complete pressure regulation valve
- Part No. LA33013/1R Complete tap 1/4" FF





Part No. LA40175

GIOTTO VERSIONS






Giotto version on trolley with 50 litres gravity tank.

PROFESSIONAL ACCESSORIES TO IMPROVE YOUR AIRLESS SPRAYPACK









Part No. LA40365Double Airless guns kit (Giotto - Dalí).

CHOOSE YOUR DALÍ CONFIGURATION

Construction solutions for maximum reliability and quality.

	PART No.	MOTOR	FITTING	HOSE	GUN
SUCTION	LAK18957/1	220 V	1/4"	LA18023	LA11250
	LA18900/1	220 V	1/4"	-	-
	LAK18958/1	110 V	1/4"	LA18023	LA11250
	LA18920/1	110 V	1/4"	-	-
50 L TANK	LAK18945/1	220 V	1/4"	LA18023	LA11250
	LA18945/1	220 V	1/4"	-	-

- · Pressure gauge include in all models
- Models with AT250 Airless spray gun include nozzle LASFC 19-40
 The K code pumps include the tool box Part No. LA17200

DALÌ ACCESSORIES

- Part No. LA40234 Diaphragm kit
- Part No. LA33017R Complete suction valve
- Part No. LA83033 Complete discharge valve
- Part No. LA32150 Complete pressure regulation valve
- Part No. LA33016 Complete return tap
- Part No. LA33016/1 Complete return tap Gravity tank model
- Part No. LA40365 Double outlet kit for two guns









PROFESSIONAL ACCESSORIES TO IMPROVE YOUR AIRLESS SPRAYPACK

FAST PAINTING FOR ALL SURFACES!

MANUAL AIRLESS AIRLESS GUN SPRAY GUN AIRLESS TIPS HIGH PRESSURE HOSES HEATER EXTENSIONS IN-LINE FILTERS SPRAY GUNS PLA MANUAL AT250 **SFC AIRLESS TIPS MIRÒ AIRLESS HOSES** Part No. LA6099 Part No. LA11019/25, Max. operating **AIRLESS SPRAY GUN** Sizes: Max. pressure 228 bar Supply voltage 230 V 200 mesh. 25 units. Ø 3/16" FITTING 1/4" pressure 250 bar Max. operating pressure from 11-20 to 51-80 · Max. current absorbed Colour filter: Red Part No. LA11250 250 bar - 450 bar 10A Lengths: • Power 2.200 W Part No. LA11037/25, Inlet swivel Part No. LA18015, 5 m 1/4" BSPP (M) 130 cm Part No. LA18016, 7,5 m Max. operating pressure 100 mesh. 25 units. Part No. LA18017, 10 m 180 cm 300 bar Colour filter: Yellow 240 cm Part No. LA18018, 15 m Maximum operating temperature: 90 °C Part No. LA11038/25, DALÍ - GIOTTO • Flow capacity: 60 I/h at 60 mesh. 25 units. **AIRLESS HOSES** 60 °C Colour filter: White Max. pressure 300 bar **TSC AIRLESS HIGH** Ø 1/4" FITTING 1/4" Part No. LA11039/25, **FINISH TIPS** 30 mesh. 25 units. Sizes: Part No. LA35023. 7.5 m Colour filter: Green from 7-10 to 31-60 Part No. LA18023, 10 m AT300 Max. operating Part No. LA18030, 15 m pressure 400 bar **AIRLESS GUN** Part No. LA11090 **EXTENSIONS** Inlet swivel 1/4" BSPP (M) Lengths: 30 cm 40 cm 60 cm **AIRLESS NOZZLES** 80 cm • Easy cleaning: turn 100 cm the nozzle and rinse. · Manufactured in tungsten carbide · Stainless steel gasket EX II 2 G Ex h IIB T6 Gb

SAMOA INDUSTRIAL, S.A. - HEADQUARTERS

SPAIN AND EXPORT MARKETS
POL. IND. PORCEYO, I-14 - CAMINO DEL FONTÁN, 831
E-33392 GIJÓN (ASTURIAS), SPAIN
TEL:: +34 985 381 488 - FAX: + 34 985 147 213

SAMOA ITALY - LARIUS

ITALY
VIA ANTONIO STOPPANI, 21
23801 CALOLZIOCORTE (LC) ITALY
Tel.: +39 0341 621242

SAMOA LTD.

UNITED KINGDOM AND REP. OF IRELAND ASTURIAS HOUSE - BARRS FOLD ROAD WINGATES INDUSTRIAL PARK WESTHOUGHTON, BL5 3XP, UK TEL.: +44 1942 850600 - FAX: +44 1942 812160

SAMOA S.A.R.L.

FRANCE P.A.E.I. DU GIESSEN 3, RUE DE BRISCHBACH 67750 SCHERWILLER, FRANCE

TEL.: +33 3 88 82 79 62 - FAX: +33 3 88 82 77 88

SAMOA FLOWTECH GMBH

GERMANY, AUSTRIA, SWITZERLAND, THE NETHERLANDS AND GREECE AM OBEREICHHOLZ 4 D - 97828 MARKTHEIDENFELD, GERMANY TEL.: +49 9391 9826 0 - FAX: +49 9391 98 26 50

SAMOA CORPORATION

USA AND CANADA 90 MONTICELLO ROAD WEAVERVILLE, NC 28787, USA TEL. +1 (828) 645-2290 - FAX: +1 (828) 658 0840

©Copyright, SAMOA INDUSTRIAL, S.A.
SAMOA Industrial, S.A. is an ISO 9001, ISO 14001 and ISO 45001 certified company.

