

Extrusion Gun EX 250 / 500

EX SERIES



YouTube

DESIGNED FOR OPERATOR'S COMFORT AND EASY CLEANING

Ultra light gun suitable for the extrusion of medium-high viscosity fluids.




EX^{SERIES} Extrusion Gun EX 250/500

TECHNICAL SPECIFICATIONS

Maximum working pressure	250 bar (3,620 psi) / 500 bar (7,250 psi)
Maximum fluid temperature	70 °C (158 °F)
Inlet fluid connection	1/4" NPSM (M)
Weight (with no nozzle and swivel)	400 g (0.88 lb) / 600 g (1.32 lb)
Wetted parts	Aluminium, stainless steel, brass, polyamide, UHMWPE, tungsten carbide

ORDER INFORMATION

26E202 (250 bar) / **26G202** (500 bar)

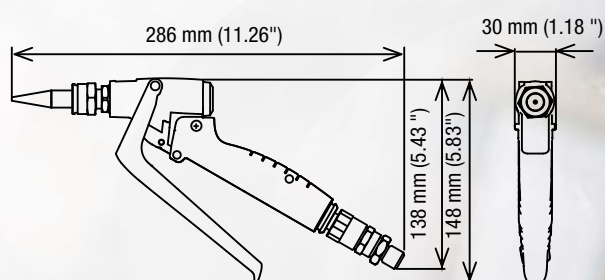

SAMOA INDUSTRIAL, S.A. - HEADQUARTERS

SPAIN AND EXPORT MARKETS

POL. IND. PORCEYO, I-14 - CAMINO DEL FONTÁN, 831

E-33392 GIJÓN (ASTURIAS), SPAIN

TEL.: +34 985 381 488

export@samoaindustrial.com - www.samoaindustrial.com



©Copyright, SAMOA INDUSTRIAL, S.A.

SAMOA Industrial, S.A. is an ISO 9001, ISO 14001 and ISO 45001 certified company.