

## LARIUS® ACCESSORIES

All packages include:

- Stainless steel trolley and pumps with air pressure regulator.
- Hydro spray gun, ventilated lance 170 cm heat-protected handle, 3 stainless steel nozzles, suction system 200 l stainless steel and 15 m - 3/8" HP hose.

### HYDRO SPRAY GUN

**Part No. 70001**  
Hydro spray gun  
3/8" BSPP



### VENTILATED LANCE

**Part No. 70007**  
Ventilated lance 70 cm  
Heat-protected handle

**Part No. 70006**  
Ventilated lance 120 cm  
Heat-protected handle

**Part No. 70000**  
Ventilated lance 170 cm  
Heat-protected handle

### STAINLESS STEEL SUCTION SYSTEM

**Part No. 3350/1**  
Stainless steel suction  
system - 1" BSPP - 200 l drum



### STAINLESS STEEL LINE FILTER

**Part No. 99250/2**  
GHIBLI pump stainless steel  
line filter

**Part No. 70155**  
SIRIO - OMEGA - NOVA  
pumps stainless steel line  
filter

### STAINLESS STEEL NOZZLES

**Angle 40° - Capacity 80 bar**  
Part No. 70010 Nozzle 02 - 4 l/min  
Part No. 70011 Nozzle 03 - 6,1 l/min  
Part No. 70012 Nozzle 04 - 8,4 l/min  
Part No. 70013 Nozzle 05 - 10 l/min  
Part No. 70014 Nozzle 06 - 12,1 l/min  
Part No. 70016 Nozzle 07 - 14,1 l/min  
Part No. 70018 Nozzle 08 - 16,1 l/min  
Part No. 70020 Nozzle 09 - 18 l/min



### STAINLESS STEEL NOZZLES

**Angle 25° - Capacity 80 bar**  
Part No. 70015 Nozzle 065 - 13,2 l/min  
Part No. 70017 Nozzle 075 - 15,2 l/min

### ANTISTATIC AIRLESS HOSE

**Part No. 18072/1**  
Max. pressure 345 bar  
Ø 3/8" - 3/8" BSPP  
Length 15 m



### SECOND GUN KIT

**Part No. 65016**  
3/8" BSPP stainless steel  
connections for two  
independent workers.

### ASPIRATION HOSES

**Part No. 98245**  
Aspiration hose for 30 l tank  
- connection 1" BSPP

**Part No. 98246**  
Aspiration hose for 1000 l  
tank - connection 1" BSPP



# LARIUS®

SAMOA Group



**LARIUS®**  
SAMOA Group

LARIUS S.r.l.  
VIA ANTONIO STOPPANI, 21  
23801 CALOLZIOCORTE (LC) ITALY  
Tel.: +39 0341 621152 - Fax: + 39 0341 621242  
export@larius.com  
www.larius.com

MADE IN ITALY SINCE 1969



## HIGH-PRESSURE, HIGH-VOLUME WASH PUMPS



FOR INTENSIVE CLEANING IN HAZARDOUS ENVIRONMENTS



## HIGH-PRESSURE AIR-OPERATED HYDRO CLEANERS

Stainless steel high pressure wash pumps for use with pure water, solvent, degreasers or washing solutions. Can be used with hot water until 90 °C.

ATEX certified pumps, can be used in potentially hazardous environments.

Pumps include a well proven, reliable air valve with a design that assures a highly efficient cold dissipation for no icing, no stalling operation using long pump runs. Suitable for intensive cleaning.


### APPLICATION

- High Pressure washing
- Marine and shipyards
  - Offshore
  - Oil and Gas
  - Mining
  - Construction
  - Agriculture
  - Service trucks

### HEAVY-DUTY USE

With cold or hot water to remove:

- Oil
- Grease
- Heat-resistant substances

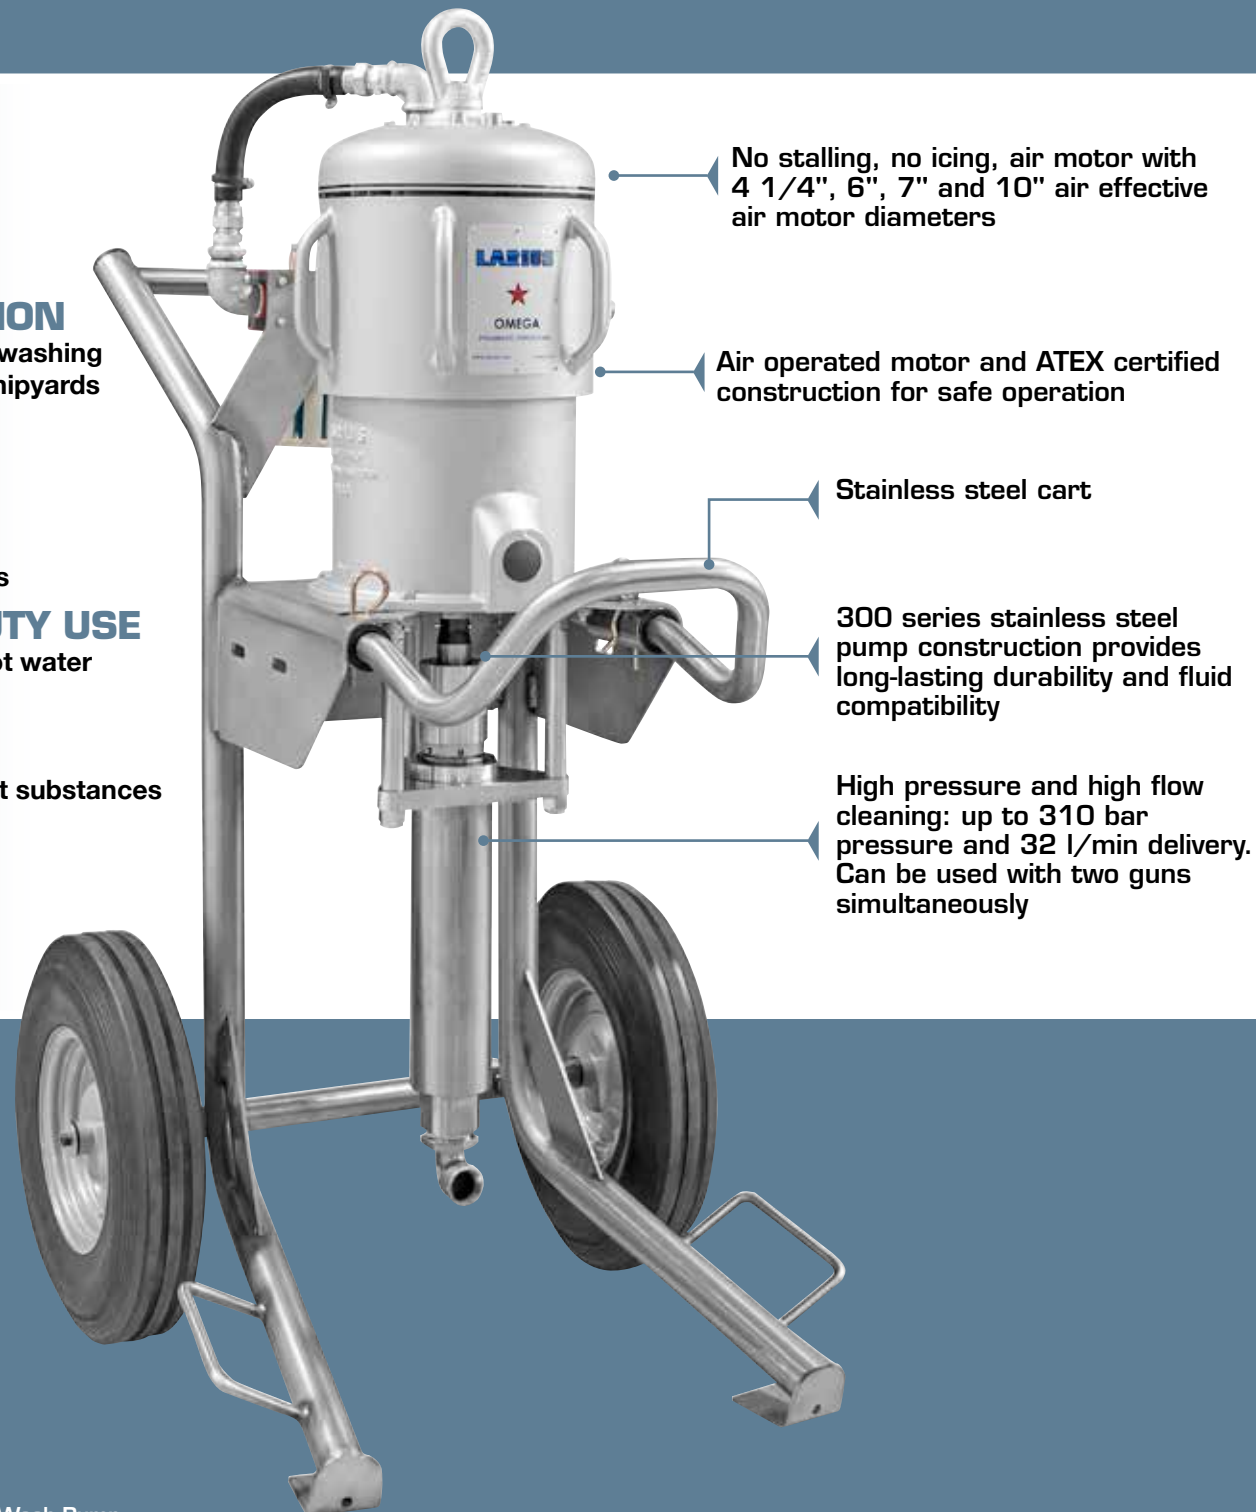

No stalling, no icing, air motor with 4 1/4", 6", 7" and 10" air effective air motor diameters

Air operated motor and ATEX certified construction for safe operation

Stainless steel cart

300 series stainless steel pump construction provides long-lasting durability and fluid compatibility

High pressure and high flow cleaning: up to 310 bar pressure and 32 l/min delivery. Can be used with two guns simultaneously

OMEGA Wash Pump

## HIGH-PRESSURE, HIGH-VOLUME WASH PUMPS AVAILABLE MODELS



ATEX certified  
EX II 2 G Ex h IIB T6 Gb  
SIRIO

ATEX certified  
Ex II 2 G c IIB T6  
GHIBLI - OMEGA - NOVA



**GHIBLI wash pump**  
4 1/4" effective air motor diameter. 10:1 pressure ratio.

**SIRIO wash pump**  
6" effective air motor diameter. 32:1 pressure ratio.

**OMEGA wash pump**  
7" effective air motor diameter. 10:1, 23:1 and 34:1 pressure ratio.

**NOVA wash pump**  
10" effective air motor diameter. 20:1, 30:1 and 45:1 pressure ratio.

### TECHNICAL DATA

| MODEL PUMP | PART No. | PRESSURE RATIO | MAXIMUM DELIVERY | PUMP AIR MOTOR | MAXIMUM AIR PRESSURE | MAXIMUM FLUID PRESSURE | DELIVERY PER CYCLE  | NOZZLES INCLUDED |
|------------|----------|----------------|------------------|----------------|----------------------|------------------------|---------------------|------------------|
| GHIBLI     | K70001   | 10:1           | 12 l/min         | 4 1/4" x 4"    | 7 bar - 100 psi      | 70 bar - 1.015 psi     | 200 cm <sup>3</sup> | 02 - 03 - 04     |
| SIRIO      | K70004   | 32:1           | 8,5 l/min        | 6" x 4"        | 7 bar - 102 psi      | 224 bar - 3.248 psi    | 140 cm <sup>3</sup> | 02 - 04 - 06     |
| OMEGA      | K70002   | 10 :1          | 32 l/min         | 7" x 4 3/4"    | 7 bar - 100 psi      | 70 bar - 1.015 psi     | 530 cm <sup>3</sup> | 05 - 075 - 08    |
|            | K70000   | 23:1           | 14 l/min         | 7" x 4 3/4"    | 7 bar - 100 psi      | 161 bar - 2.335 psi    | 230 cm <sup>3</sup> | 02 - 04 - 06     |
|            | K70005   | 34:1           | 11 l/min         | 7" x 4 3/4"    | 7 bar - 100 psi      | 238 bar - 3.451 psi    | 180 cm <sup>3</sup> | 02 - 03 - 05     |
| NOVA       | K70003   | 20:1           | 32 l/min         | 10" x 4 3/4"   | 7 bar - 100 psi      | 140 bar - 2.030 psi    | 530 cm <sup>3</sup> | 05 - 075 - 08    |
|            | K70007   | 30:1           | 23 l/min         | 10" x 4 3/4"   | 7 bar - 100 psi      | 210 bar - 3.045 psi    | 380 cm <sup>3</sup> | 04 - 065 - 07    |
|            | K70006   | 45:1           | 14 l/min         | 10" x 4 3/4"   | 7 bar - 100 psi      | 315 bar - 4.568 psi    | 230 cm <sup>3</sup> | 02 - 04 - 06     |