







LOOKING FOR AN EQUIPMENT TO APPLY TEXTURE MATERIALS FASTER? MINIPEGASO IS THE RIGHT ANSWER.

Spray solvent-free texture materials with suspended solids up to 3 mm.

MINIPEGASO pneumatic texture sprayer applies a wide range of products for covering and grouting walls, facades, ceilings and other surfaces, fast and efficiently. With a 50 I tank, it is possible to cover larger areas with no need to stopping to refill. Models with different hose lengths for better reach are available on request.

- · Fast and uniform surface cover
- · Reduced material waste
- · Robust and compact design
- · Easy to use with minimum maintenance.



TURBO GUN:
Efficient product delivery:
Max. air pressure
8 bar - 116 psi
Max. fluid pressure
20 bar - 290 psi





50 I Gravity Tank. Can be removed from the trolley without using any tools

L4 1:1

Double diaphragm low pressure pneumatic pump

- Instant product delivery
- Anti-corrosive and leak-proof construction
- · Reinforced diaphragms for long life



MATERIALS

SOLVENT-FREE - PARTICLE SIZE UP TO 3 mm

- PREMIXED MORTARS
- FILLING, CEMENT AND GRANULAR PLASTERS
- FIREPROOF MATERIALS
- WATERPROOFING
- FIBER COATINGS
- SILICATE PAINTS
- PLASTER
- MASTIC
- POLYMERS WITH SILICA OR SAND FILLERS
- CEMENT SEALANTS
- CEMENT-BASED ADHESIVES

APPLICATIONS

 COVERING AND GROUTING INTERNAL AND I WALLS, CEILINGS, FACADES, ETC.

TECHNICAL DATA

PUMP TYPE Double Diaphragm pneumatic pump POWER SOURCE Compressed air 40 I/min MAX. DELIVERY 40 I/min 7 bar MAX. FLUID PRESSURE 7 bar MAX. AIR CONSUMPTION 190 I/min AIR INLET 1/4" BSPP (F) FLUID OUTLET 1" BSPP (M) MATERIAL INLET 1" BSPP (M) MAX. ACOUSTIC LEVEL 50 db (A) WEIGHT				
MAX. DELIVERY 40 l/min MAX. AIR PRESSURE 7 bar MAX. FLUID PRESSURE 7 bar MAX. AIR CONSUMPTION 190 l/min AIR INLET 1/4" BSPP (F) FLUID OUTLET 1" BSPP (M) MATERIAL INLET 1" BSPP (M) MAX. ACOUSTIC LEVEL 50 db (A)	PUMP TYPE	Double Diaphragm pneumatic pump		
MAX. AIR PRESSURE 7 bar MAX. FLUID PRESSURE 7 bar MAX. AIR CONSUMPTION 190 l/min AIR INLET 1/4" BSPP (F) FLUID OUTLET 1" BSPP (M) MATERIAL INLET 1" BSPP (M) MAX. ACOUSTIC LEVEL 50 db (A)	POWER SOURCE	Compressed air		
MAX. FLUID PRESSURE 7 bar MAX. AIR CONSUMPTION 190 l/min AIR INLET 1/4" BSPP (F) FLUID OUTLET 1" BSPP (M) MATERIAL INLET 1" BSPP (M) MAX. ACOUSTIC LEVEL 50 db (A)	MAX. DELIVERY	40 l/min		
MAX. AIR CONSUMPTION 190 l/min AIR INLET 1/4" BSPP (F) FLUID OUTLET 1" BSPP (M) MATERIAL INLET 1" BSPP (M) MAX. ACOUSTIC LEVEL 50 db (A)	MAX. AIR PRESSURE	7 bar		
AIR INLET 1/4" BSPP (F) FLUID OUTLET 1" BSPP (M) MATERIAL INLET 1" BSPP (M) MAX. ACOUSTIC LEVEL 50 db (A)	MAX. FLUID PRESSURE	7 bar		
### To the control of	MAX. AIR CONSUMPTION	190 I/min		
MATERIAL INLET 1" BSPP (M) MAX. ACOUSTIC LEVEL 50 db (A)	AIR INLET	1/4" BSPP (F)		
MAX. ACOUSTIC LEVEL 50 db (A)	FLUID OUTLET	1" BSPP (M)		
00 45 (1)	MATERIAL INLET	1" BSPP (M)		
WEIGHT 60 kg	MAX. ACOUSTIC LEVEL	50 db (A)		
	WEIGHT	60 kg		



MINIPEGASO

PART No.	PUMP MODEL	PVC ANILOX HOSE	TURBO GUN	Ø NOZZLES	50 I TANK
20871	Part No. 8300/4 L4 1:1 Polyurethane diaphragms and balls	Part No. 20835 Ø 19 x 26 - 10 m	Part No. 21050	Part No. 21087 3 mm - 4 mm 6 mm - 8 mm	Part No. 18241


ACCESSORIES

TERNAL

TURBO GUN	NOZZLES	PVC ANILOX HOSES	50 I TANK			
Part No. 21050 Max. air pressure 8 bar - 116 psi Max. fluid pressure 20 bar - 290 psi Mozzles included: mm - 4 mm - 6 mm - 8 mm	Part No. 21073 Ø 3 mm Part No. 21074 Ø 4 mm Part No. 21075 Ø 6 mm Part No. 21076 Ø 8 mm NOZZLES KIT Part No. 21087 Ø 3 mm - Ø 4 mm Ø 6 mm - Ø 8 mm	Part No. 20835 Ø 19 x 26 mm - 10 m Part No. 20840 Ø 19 x 26 mm - 15 m Part No. 20846 Ø 19 x 26 mm - 30 m Part No. 20847 Ø 42 x 32 mm - 10 m Part No. 20848 Ø 42 x 32 mm - 15 m INTERNAL HOSE CLEANING BALL Part No. 30586 1 unit - Sponge ball Ø 30 - Density 0,27	Part No.18241 50 I gravity tank with metal support Part No. 18245 50 I gravity tank with cover			
L4 1:1 DOUBLE DIAPHRAGM LOW PRESSURE PNEUMATIC PUMP KIT						

Part No. 40332
Motor gaskets kit

Part No. 40336
Balls housing kit
Part No. 40337
Diaphragms kit
Part No. 40337
Diaphragms kit
Part No. 3345
Air pressure regulator 1/4" +
Pressure gauge 0 - 10 bar

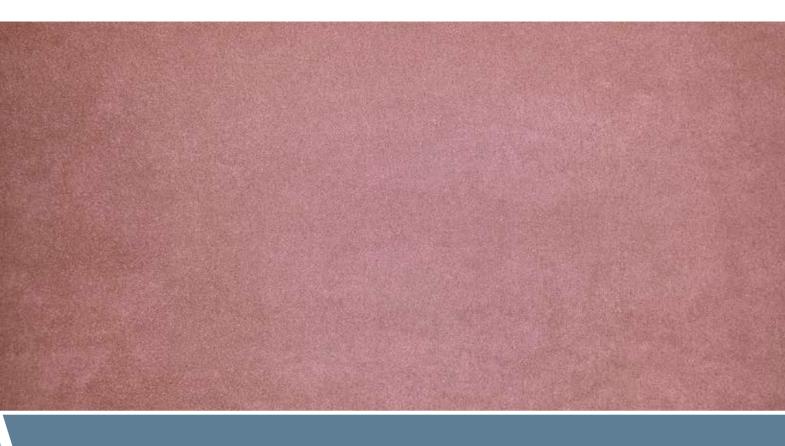



LARIUS S.r.I.
VIA ANTONIO STOPPANI, 21
23801 CALOLZIOCORTE (LC) ITALY
Tel.: +39 0341 621152 - Fax: +39 0341 621242
export@larius.com

MADE IN ITALY SINCE 1969





