



HIGH-PRESSURE, HIGH-VOLUME WASH PUMPS

For intensive cleaning in hazardous environments

PROFESSIONAL PRESSURE AIR OPERATED WASHER

Stainless steel high pressure wash pumps for use with pure water, solvent, degreasers or washing solutions. Can be used with hot water until 90 °C.

ATEX certified pumps, can be used in potentially hazardous environments.


Pumps include a well proven, reliable air valve with a design that assures a highly efficient cold dissipation for no icing, no stalling operation using long pump runs. Suitable for intensive cleaning.

Air operated motor and ATEX certified construction for safe operation

High pressure and high flow cleaning: up to 310 bar press. and 66 l/min delivery. Can be used with two guns simultaneously

No stalling, no icing, air motor with 4 1/4", 6", 7" and 10" air effective air motor diameters

303 series stainless steel pump construction provides long-lasting durability and fluid compatibility

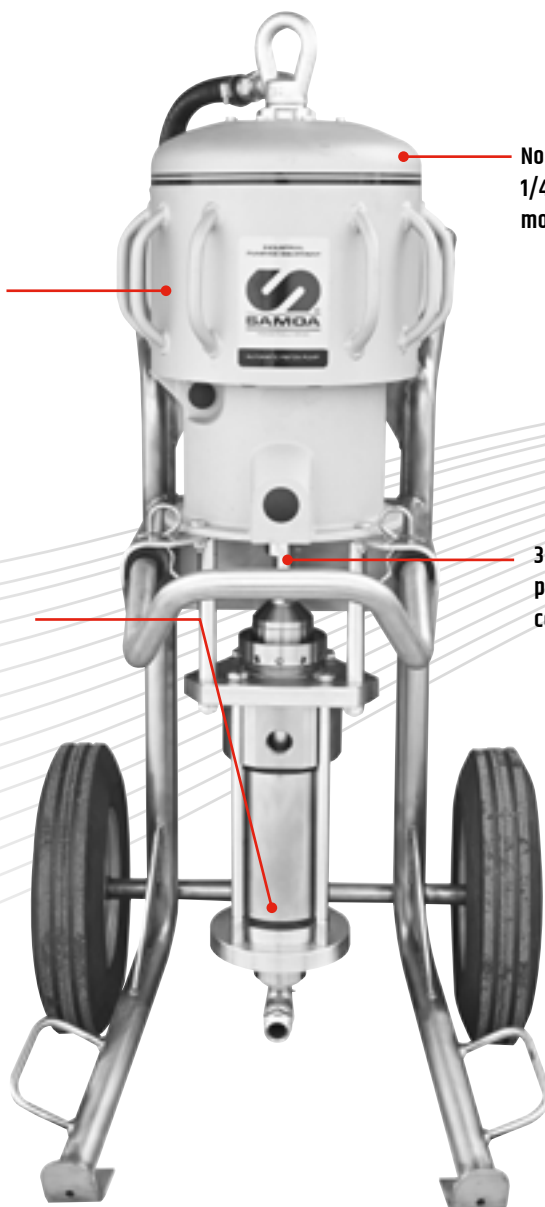

Nova 10:1 stainless steel washing pump

HEAVY-DUTY USE

With cold or hot water to remove:

- Oil
- Grease
- Heat-resistant substances

APPLICATION

- Marine and shipyards
- Offshore
- Oil and Gas
- Mining
- Construction
- Agriculture
- Service trucks

AIRLESS & HIGH VOLUME WASH PUMPS


AISI 303
Stainless Steel



GHIBLI WASH PUMP
4 1/4" effective air motor
diameter. 10:1 pressure ratio



OMEGA WASH PUMP
7" effective air motor diameter.
5:1, 10:1 and 23:1 pressure ratio

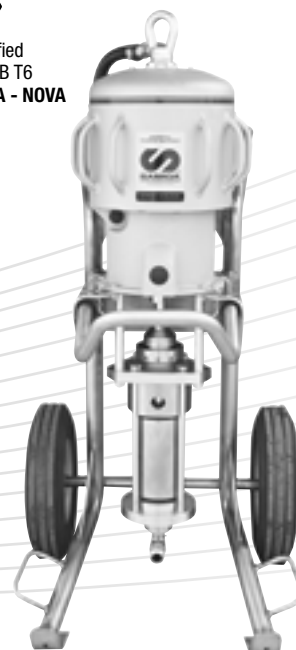

NOVA WASH PUMP
10" effective air motor diameter.
10:1, 20:1, 30:1 and 45:1 pressure ratio

CHOOSE YOUR CONFIGURATION - TECHNICAL DATA

MODEL	CONFIGURATION	PART. No.	MAX. DELIVERY	Ø PUMP AIR MOTOR - STROKE	MAX. AIR PRESSURE	MAX. FLUID PRESSURE	DELIVERY PER CYCLE	TIPS INCLUDED
GHIBLI 10:1	On trolley	LAK70001	12 l/min	Ø 4" 1/4 x 4"	7 bar - 102 psi	70 bar - 1.015 psi	200 cm³	02 - 03 - 04
	On wall	LAK70008						
	For 200 l drum	LAK70009						
SIRIO 32:1	On trolley	LAK70004	8,5 l/min	Ø 6" x 4"	7 bar - 102 psi	224 bar - 3.248 psi	140 cm³	02 - 04 - 06
OMEGA 5:1	On trolley	LAK70019	66 l/min	Ø 7" - 4 3/4"	7 bar - 102 psi	40 bar - 600 psi	1.100 cm³	05 - 075 - 08
	On wall	LAK70020						
OMEGA 10:1	On trolley	LAK-70002	32 l/min	Ø 7" - 4 3/4"	7 bar - 102 psi	80 bar - 1.160 psi	530 cm³	05 - 075 - 08
	On wall	LAK70011						
OMEGA 23:1	On trolley	LAK70000	14 l/min	Ø 7" - 4 3/4"	7 bar - 102 psi	161 bar - 2.335 psi	230 cm³	02 - 04 - 06
	On wall	LAK70012						
NOVA 10:1	On trolley	LAK70017	66 l/min	Ø 10" - 4 3/4"	7 bar - 102 psi	80 bar - 1.160 psi	1.100 cm³	05 - 075 - 08
	On wall	LAK70018						
NOVA 20:1	On trolley	LAK70003	32 l/min	Ø 10" - 4 3/4"	7 bar - 102 psi	140 bar - 2.030 psi	530 cm³	05 - 075 - 08
	On wall	LAK70014						
NOVA 30:1	On trolley	LAK-70007	23 l/min	Ø 10" - 4 3/4"	7 bar - 102 psi	210 bar - 3.045 psi	380 cm³	04 - 065 - 07
	On wall	LAK70015						
NOVA 45:1	On trolley	LAK70006	14 l/min	Ø 10" - 4 3/4"	7 bar - 102 psi	315 bar - 4.568 psi	230 cm³	02 - 04 - 06
	On wall	LAK70016						

ACCESSORIES

All pressure washers include:

- Air pressure regulator
- Hydro spray gun
- Ventilated lance with heat-protected handle 170 cm
- 3 stainless steel nozzles
- Stainless steel suction system 200 l
- High pressure hose 345 bar - Ø 3/8" - 3/8" BSPP 15 m

HYDRO SPRAY GUN

PART No.	DESCRIPTION
LA70001R	Hydro spray gun 3/8" BSPP

VENTILATED LANCE

LA70007R	Ventilated lance 70 cm. Heat-protected handle
LA70006R	Ventilated lance 120 cm. Heat-protected handle
LA70000R	Ventilated lance 170 cm. Heat-protected handle

STAINLESS STEEL SUCTION SYSTEM

LA70150	Stainless steel suction system - 1" BSPP - 200 l drum
---------	---

STAINLESS STEEL LINE FILTER

LA99250/2	GIBLI pump stainless steel line filter
LA70155	SIRIO - OMEGA - NOVA pumps stainless steel line filter

ASPIRATION HOSES

LA98245	Aspiration hose for 30 l stainless steel tank - connection
LA98246	Aspiration hose for 1000 l stainless steel tank - connection

STAINLESS STEEL NOZZLES Angle 40° - Capacity 80 bar

LA70020R	02 - 4 l/min
LA70011R	03 - 6,1 l/min
LA70012R	04 - 8,4 l/min
LA70013R	05 - 10 l/min
LA70014R	06 - 12,1 l/min
LA70016R	07 - 14,1 l/min
LA70018R	08 - 16,1 l/min
LA70020R	09 - 18 l/min

STAINLESS STEEL NOZZLES Angle 25° - Capacity 80 bar

LA70015R	065 - 13,2 l/min
LA70015R	075 - 15,2 l/min

ANTISTATIC AIRLESS HOSE

LA18072/1	Airless hose max. pressure 345 bar Ø 3/8" - 3/8" BSPP Length 15 m
-----------	---

SECOND GUN KIT

LA65016	Stainless steel connections 3/8" BSPP for two independent workers for two independent workers
---------	---

SAMOA INDUSTRIAL, S.A. - HEADQUARTERS

SPAIN AND EXPORT MARKETS
POL. IND. PORCEYO, I-14 - CAMINO DEL FONTÁN, 831
E-33392 GIJÓN (ASTURIAS), SPAIN
TEL: +34 985 381 488 - FAX: +34 985 147 213

SAMOA ITALY - LARIUS

ITALY
VIA ANTONIO STOPPANI, 21
23801 CALOLZIOCORTE (LC) ITALY
Tel: +39 0341 621152 - Fax: +39 0341 621242
www.larius.com

SAMOA LTD.

UNITED KINGDOM AND REP. OF IRELAND
ASTURIAS HOUSE - BARRS FOLD ROAD
WINGATES INDUSTRIAL PARK
WESTHOUGHTON, BL5 3XP, UK
TEL: +44 1942 850600 - FAX: +44 1942 812160

SAMOA S.A.R.L.

FRANCE
P.A.E.I. DU GIESSEN
3, RUE DE BRISCHBACH
67750 SCHERWILLER, FRANCE
TEL: +33 3 88 82 79 62 - FAX: +33 3 88 82 77 88

SAMOA FLOWTECH GMBH

GERMANY, AUSTRIA, SWITZERLAND, THE NETHERLANDS AND GREECE
AM OBEREICHHOLZ 4
D - 97828 MARKTHEIDENFELD, GERMANY
TEL: +49 9391 9826 0 - FAX: +49 9391 98 26 50

SAMOA CORPORATION

USA, CANADA AND MEXICO
90 MONTICELLO ROAD
WEAVERVILLE, NC 28787, USA
TEL: +1 (828) 645-2290 - FAX: +1 (828) 658 0840



©Copyright, SAMOA INDUSTRIAL, S.A.
SAMOA Industrial, S.A. is an ISO 9001, ISO 14001 and ISO 45001 certified company.

